

BigEasyDriver v1.0

www.schmalzhaus.com/BigEasyDriver






An easy to use bipolar stepper motor driver
 Use 4 wire, 6 wire or 8 wire stepper motors
 From about 150mA/phase to about 750mA/phase
 Defaults to 5V for Vcc (logic supply), settable to 3.3V
 Supply 8V to 30V DC power input on JP1
 Do not connect or disconnect motor while EasyDriver is powered

DEFAULT OPTIONS
 Short JP5, JP6, JP7 pins to GND or Vcc to override

SLEEP = Vcc (awake)
 MS1 = Vcc (1/8 microstep)
 MS2 = Vcc (1/8 microstep)
 ENABLE = GND (enabled)
 RESET = Vcc (not reset)
 PFD = Vcc (slow decay mode)

DIR is level sensitive
 A rising edge on STEP causes a step
 Both take 0V to Vcc

Coil 1 of motor across OUT1B and OUT1A
 Coil 2 of motor across OUT2B and OUT2A

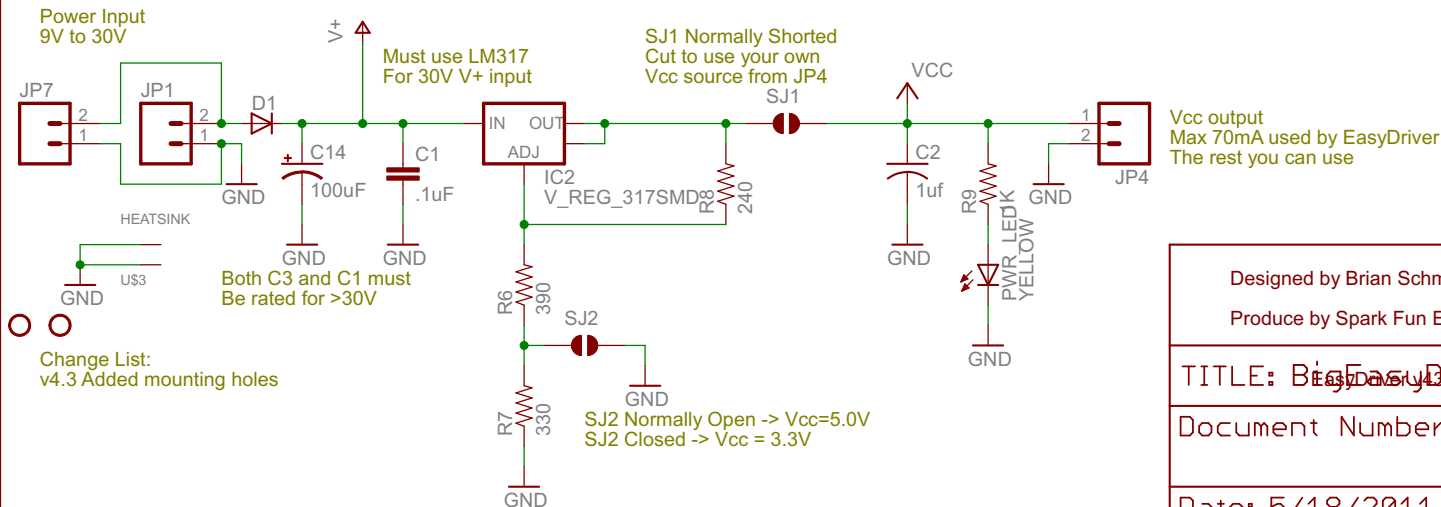

EasyDriver v4.3 by Brian Schmalz is licensed under a Creative Commons Attribution 3.0 US License

Designed by Brian Schmalz
 Produce by Spark Fun Electronics

TITLE: BigEasyDriver_v10 SFE

Document Number: REV:

Date: 5/18/2011 8:41:41 AM Sheet: 1/1